



K-BUS

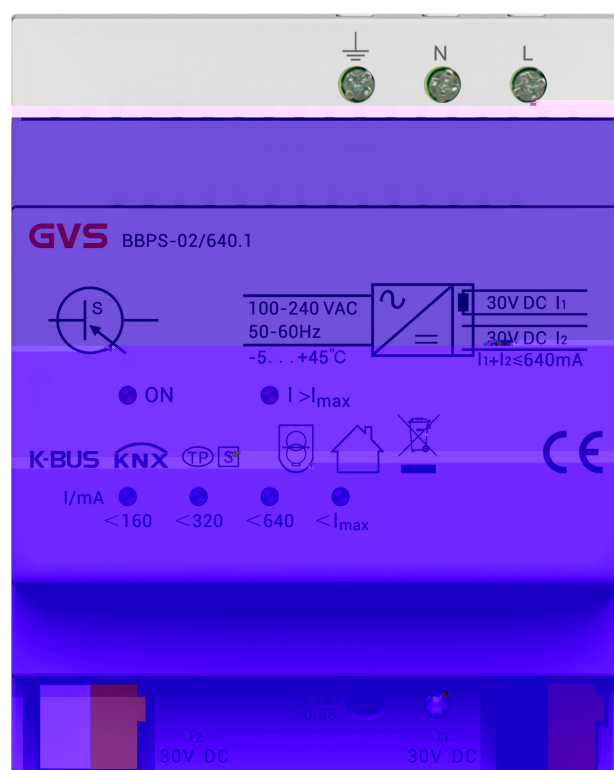

注意事项

1、请远离强磁场、高温、潮湿等环境。

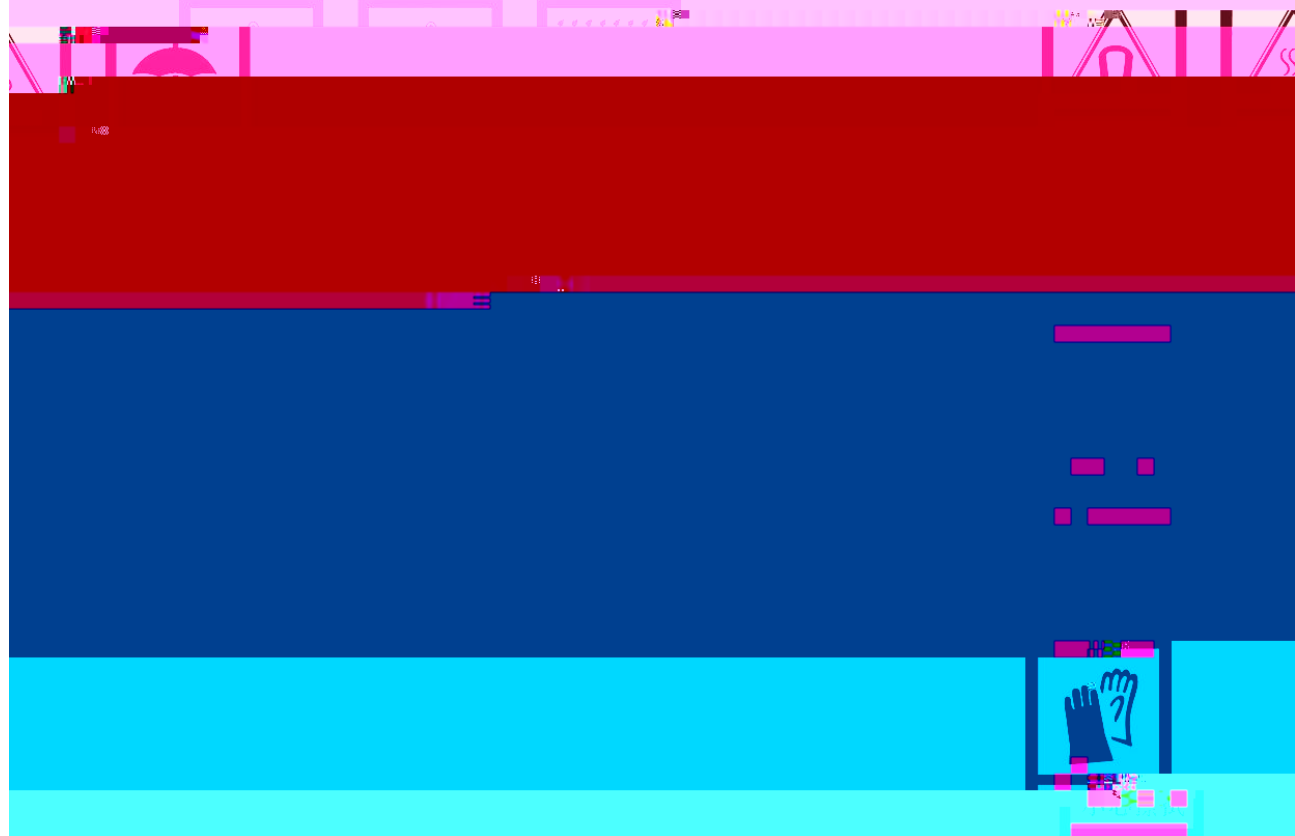

卸本设备。

4、请勿自行拆

GVS

K-BUS

KNX/EIB

KNX

, 640mA

KNX

KNX

30V DC

KNX

EN 60 715

35

KNX /

/ m

230V AC

100-240V AC 50-60H	
80%	
KNX	1
KNX	30V +1V/-2V DC SELV
	1
	30 1V DC SELV
KNX	640mA
	<1.5A
	>200m
22	(>0.5
KNX	)
LED1	
LED2 ON	
LED3 I I _{ma}	/ I>I _{ma}
LED4	1 0 I<160 20 mA
LED5	2 160 I<320 20 mA
LED6	3 320 I<640 20 mA
LED7	4 640 I<I _{ma}

3	
KNX	0.5 2.5mm ²
	0.5 1.5mm ²
	1 /
	2 /
-5 C ...+ 45 C	
25 C ... + 55 C	
25 C ... + 70 C	
93%	
35mm	
72Ö90Ö64mm	
0.3KG	

