

K-BUS



注意事项



3、不要使用湿布或具挥发性的试剂擦拭设备；



警告：请勿将设备浸入液体中。

[illegible]

KNX

KNX

KNX

PC

KNX

DC

Type-C

2

1

1

KNX

C

USB3.0

USB

KNX

KNX

KNX

USB

ETS

(

ETS5

KNX

KNX

KNX

APDU

240


HID


USB

“cEMI”

	DC	9~24V DC	
	Type-C	5V DC	
KNX	1	24~26V DC	
	1	24~26V DC	
	DC	300mA	
	Type-C	100mA	
	DC	24V	300mA
	Type-C	<300mA	
Type-C	USB2.0		
KNX		(/)	
	/		
	DC	(DC-005 5.5-2.1mm)/Type-C	
A	USB2.0		
	USB	3m	
DC	LED		
Type-C	LED		
KNX	LED	PC	
		PC	
		KNX	
		KNX	
		KNX	
Type-C	LED		

ON	OFF
– 5 °C ... 45 °C	
– 25 °C ... 55 °C	
– 25 °C ... 70 °C	
<93%	
54 × 91 × 26 mm	
0.15kg	

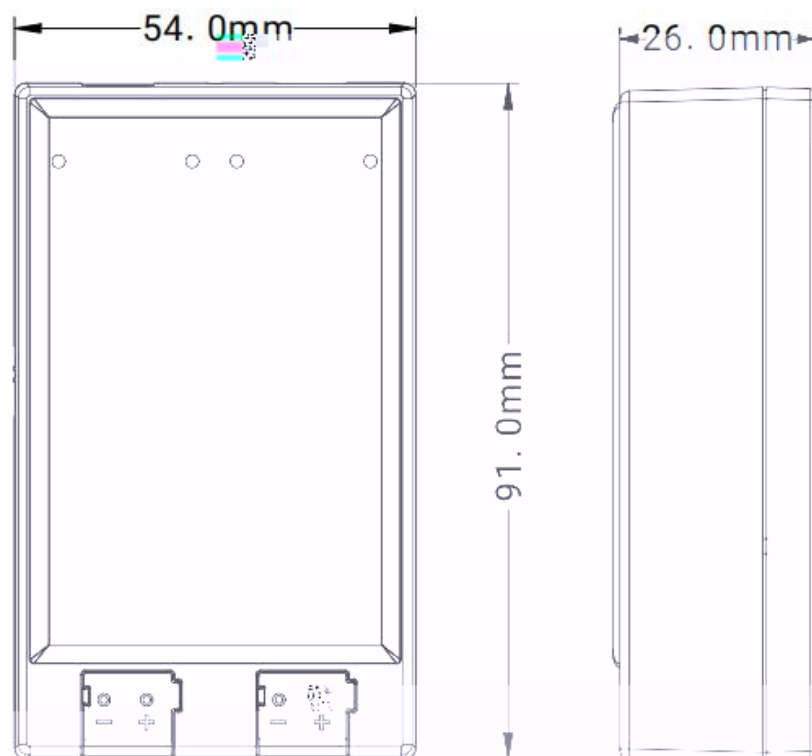

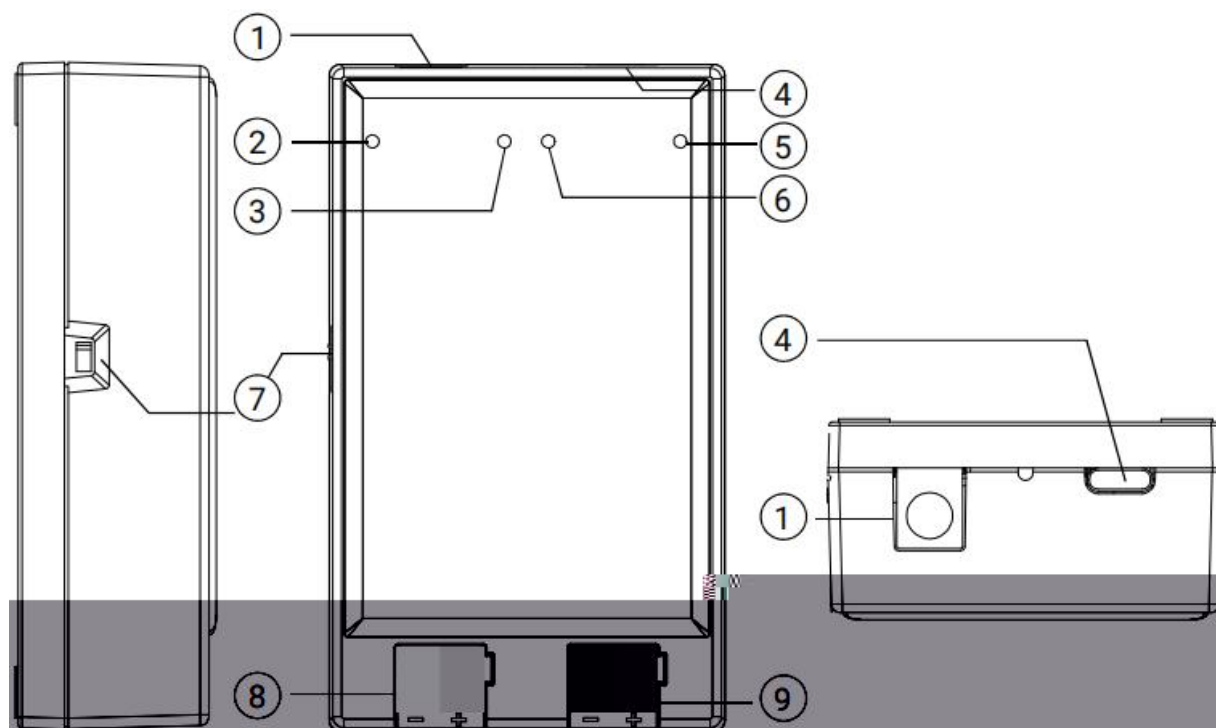

DC

KNX

LED

DC

LED

Type-C

LED

Type-C

/KNX

KNX

Type-C

LED


KNX

Type-C

KNX

ETS



:

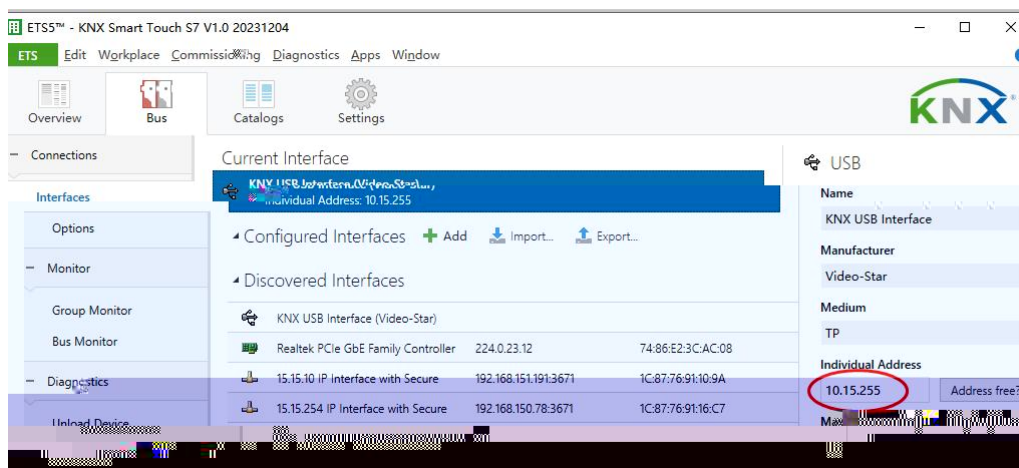

4.1 ETS5

--

1

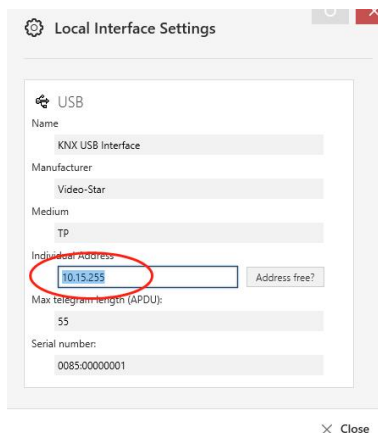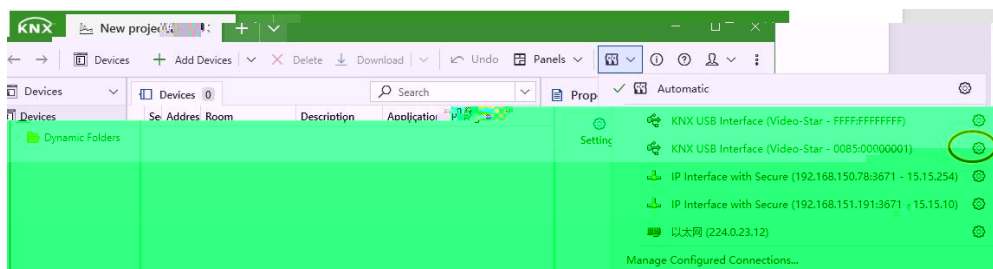

4.1 ETS6

--

2

KNX

4.1

KNX

KNX

LED

KNX

DC

LED

Type-C

LED

DC

24V

300mA

DC