



M **_V1.0**
M-AS01

注意事项

1. 请远离强磁场、高温、潮湿等环境；



3. 不要使用湿布或具挥发性的试剂擦拭设备；

		1
1.1		1
1.2		1
		2
2.1		2
2.2		3
2.3		4
		5
3.1		5
3.2		6
		7
4.1		7
4.2		7
4.2.1		7
4.2.2		8
4.3		8
4.3.1		8
4.3.2		9
4.3.3		9
4.3.4		9
		10
5.1		10
5.2		11
5.3		

6.4		14
6.5		16
6.6		16
		17
7.1		17
7.2		18
7.3		18
7.4		19
7.5		19
7.6		20

M

TCP/IP

1.1

- 7 TFT
- IC
- LED
-
- /
-

1.2

DC 24V

200mA

300mA

-10

+55

95%

CMOS

200W

123°

3.5mm

0 lux



LCD

7”


600×1024

(W/H/D) 148.5×363×47 mm


2.1

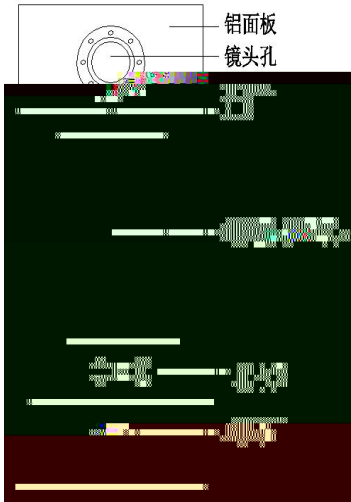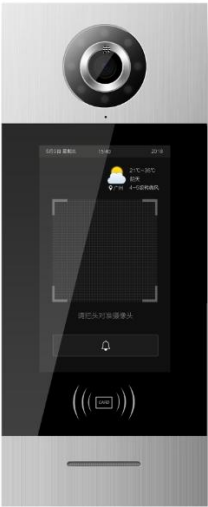

2.2

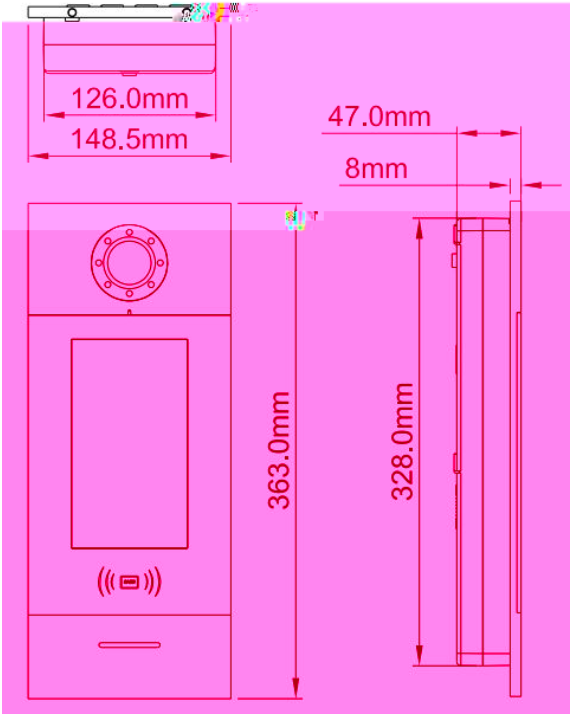

2.3

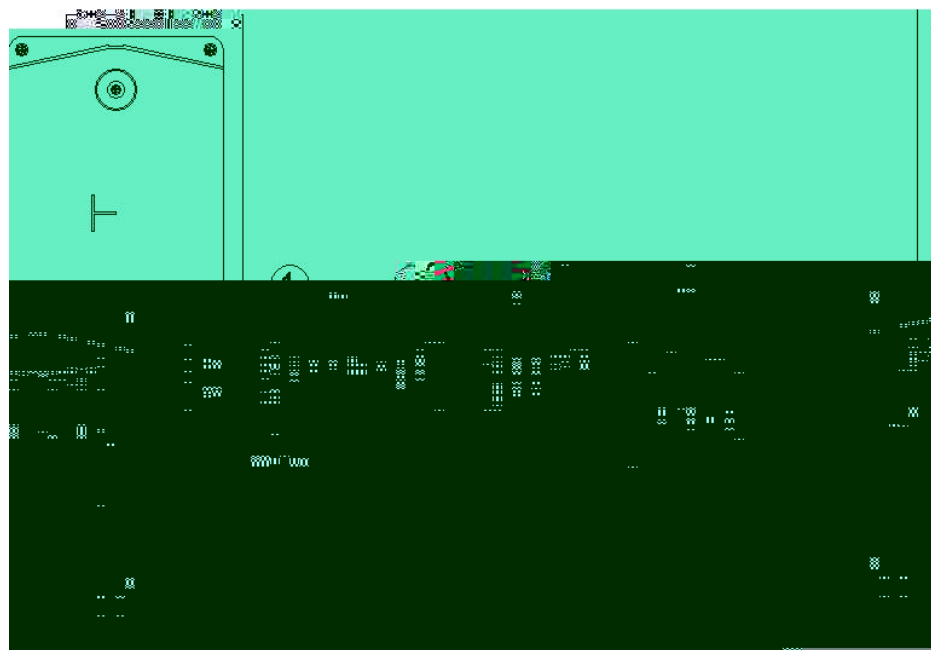

DC 24V


DC 18-30V

+12V


>18V

3.1

W/H/D 1


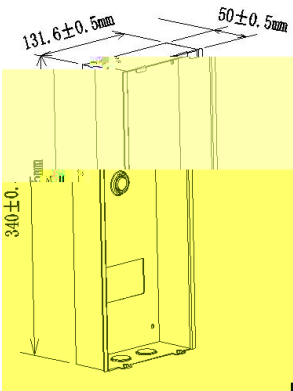


2

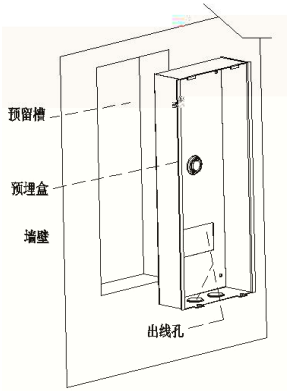


3

4

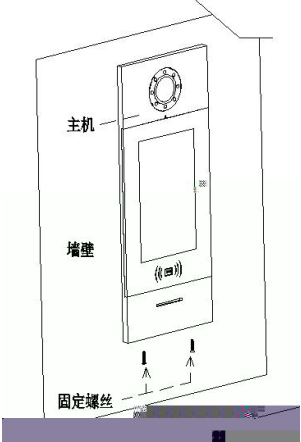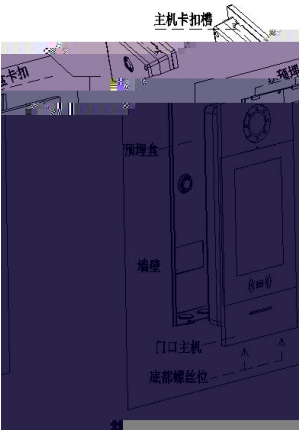

5

3.2

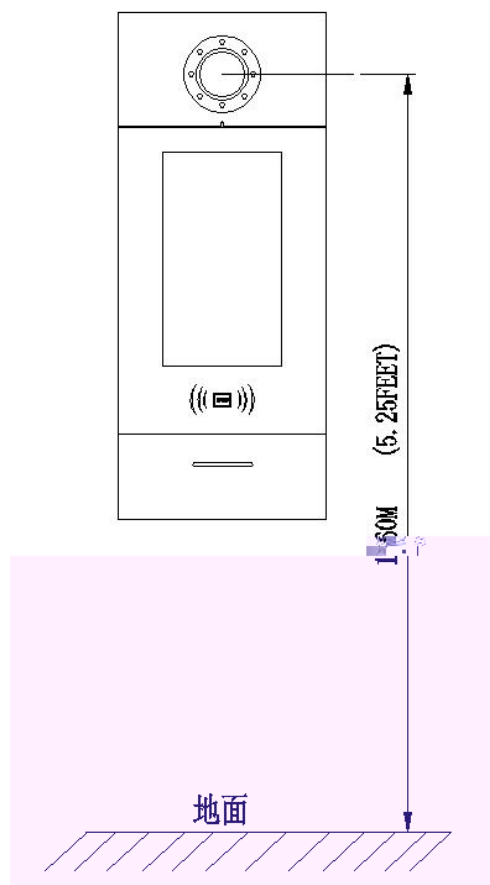

1.6

4.1



4.2

4.2.1



1




2

2718





4.2.2

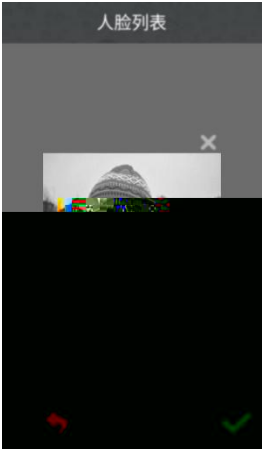

4.3

4.3.1

4.3.2

4.3.3



2



4.3.4



2




3 5678

5.1




5.2

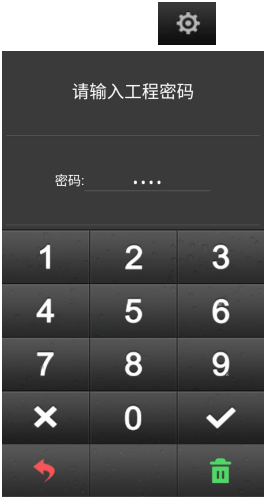

“2718”

5.3




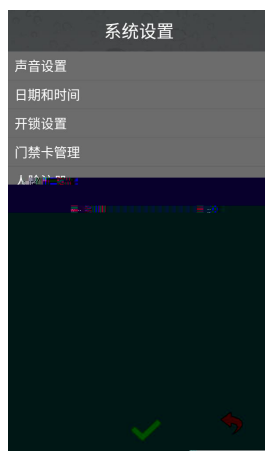

6.1



6.2

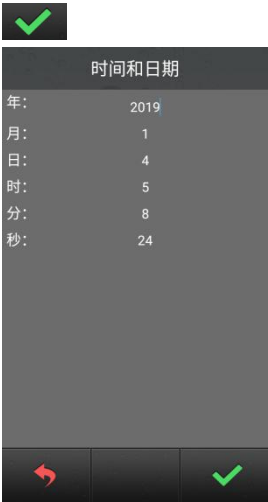


6.3




6.4



●

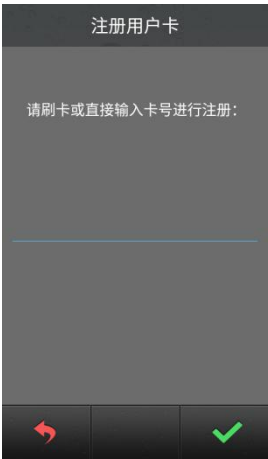

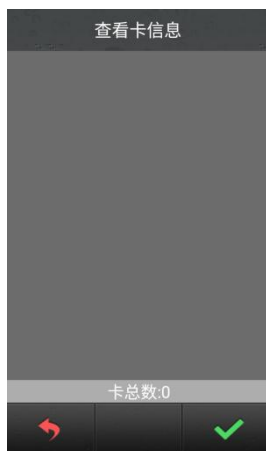

“

”




“


”




“ ”

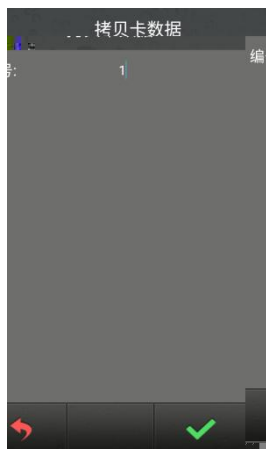

6.5

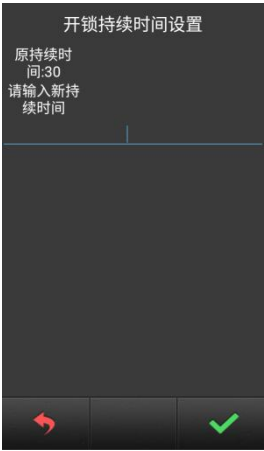

6.6

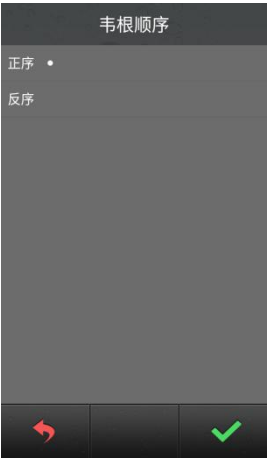



7.1



ip

7.2




7.3



6

7.4

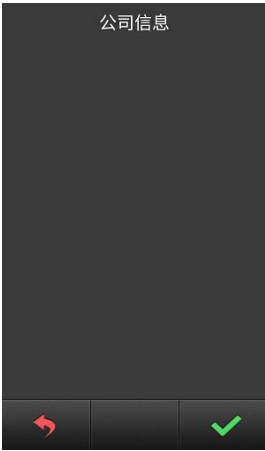

7.5



IP MAC

7.6

