



M **_V1.0**
M-AS01

注意事项

1. 请远离强磁场、高温、潮湿等环境；



2. 请勿在强磁场、高温、潮湿等环境下使用；



Category	Count
1	1
1.1	1
1.2	1
2	2
2.1	2
2.2	3
2.3	4
3	5
3.1	5
3.2	6
4	7
4.1	7
4.2	7
4.2.1	7
4.2.2	8
4.3	8
4.3.1	8
4.3.2	9
4.3.3	9
4.3.4	9
5	10
5.1	10
5.2	11
5.3	11

6.4		14
6.5		16
6.6		16
		17
7.1		17
7.2		18
7.3		18
7.4		19
7.5		19
7.6		20

M

TCP/IP

1.1

- 7 TFT
- IC
- LED
-
- /
-

1.2

DC 24V

200mA

300mA

-10

+55

95%

CMOS

200W

123°

3.5mm

0 lux



LCD

7”


600×1024

(W/H/D) 148.5×363×47 mm

2.1

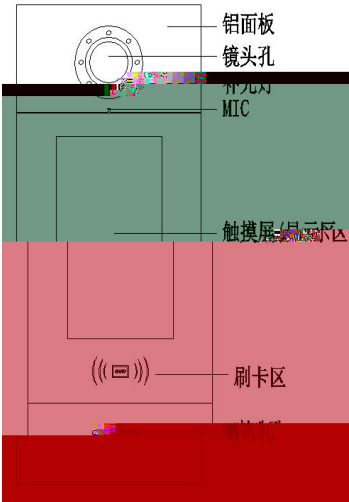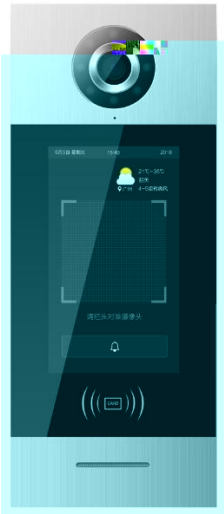

2.2

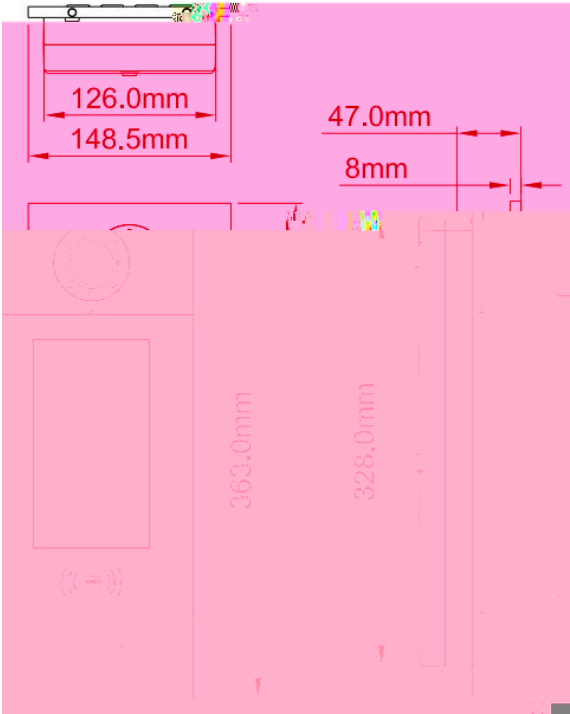

2.3



DC 24V

DC 18-30V



+12V

>18V

3.1



2

W/H/D 1

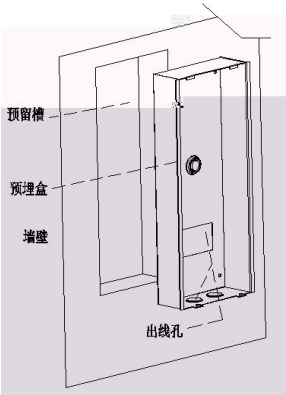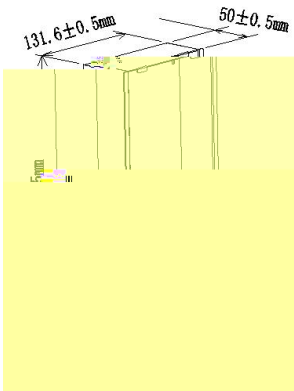


3

4

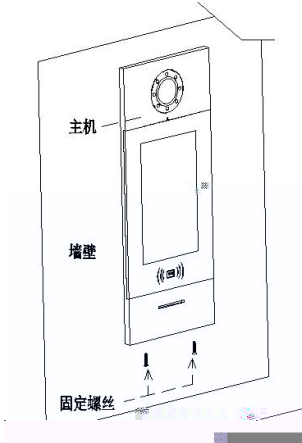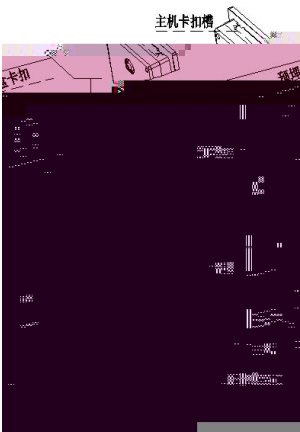

5

3.2

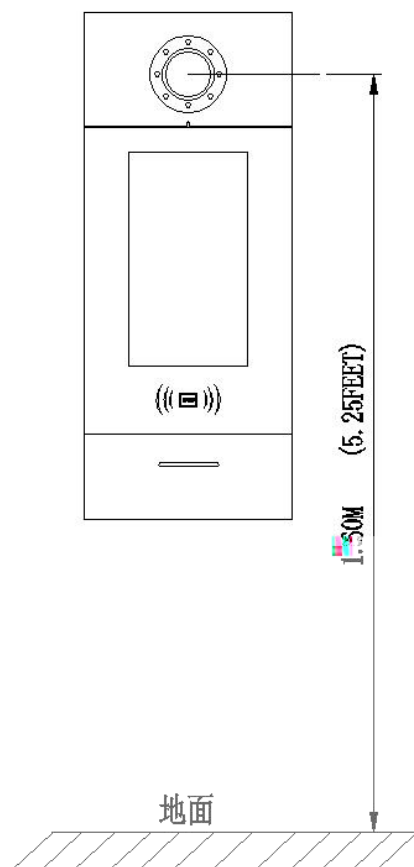

1.6

4.1




4.2

4.2.1




1

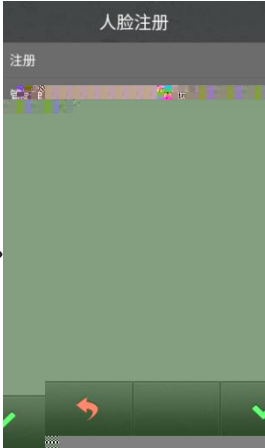


2

2718



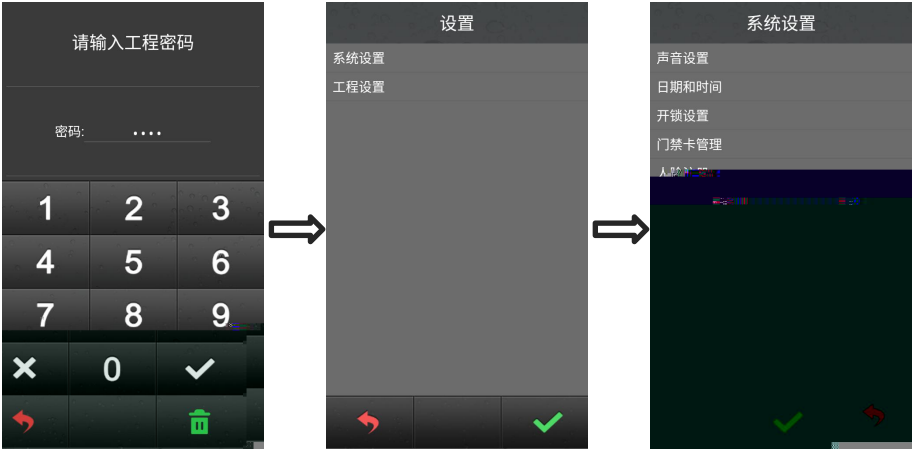

4.2.2

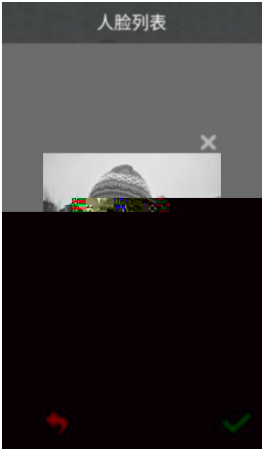

4.3

4.3.1

4.3.2

4.3.3

1



2

3



4.3.4

1




2




3 5678

5.1

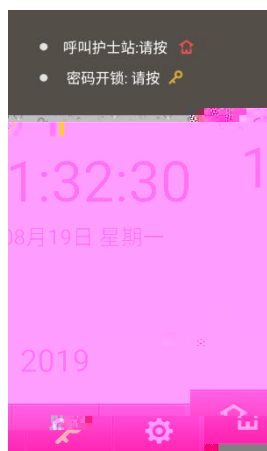


5.2

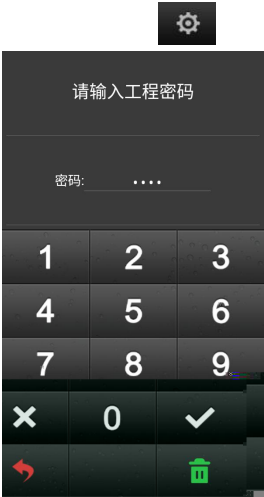

“2718”

5.3




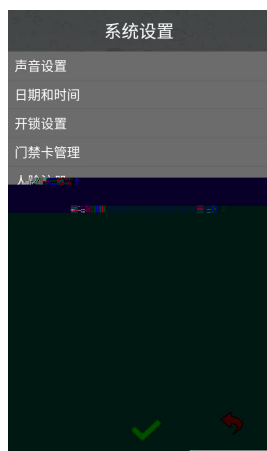

6.1



6.2

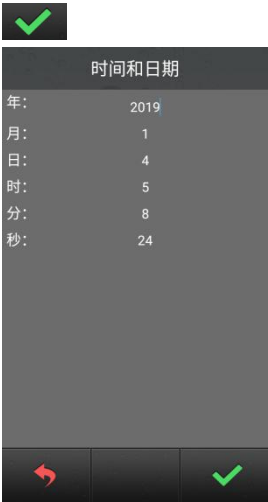


6.3



6.4



●

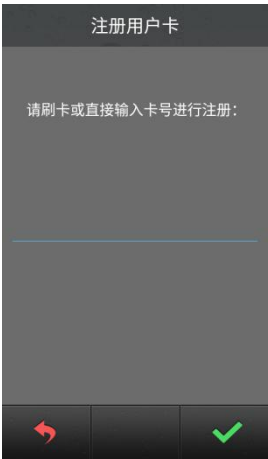



“

”




“


”





“ ”

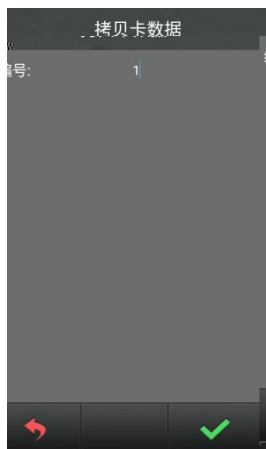

6.5

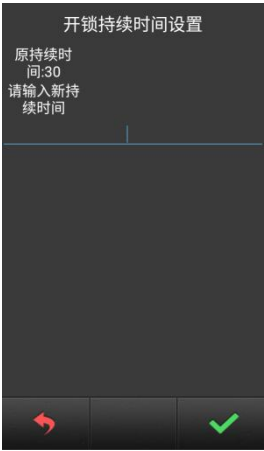

6.6

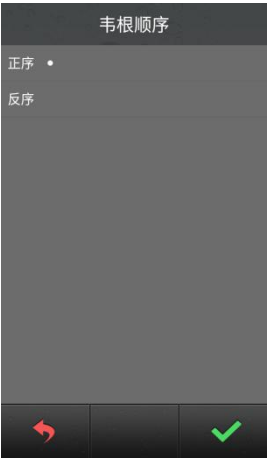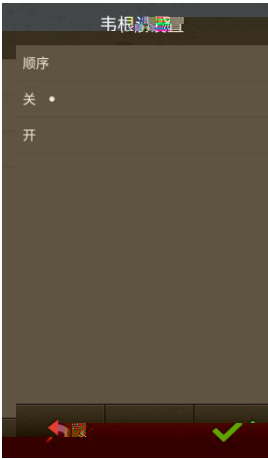




7.1



ip

7.2

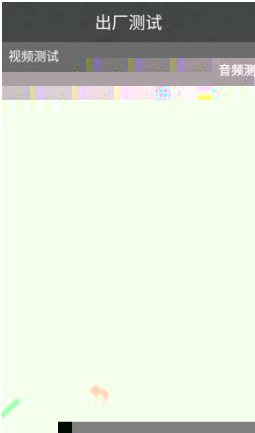


7.3



6

7.4

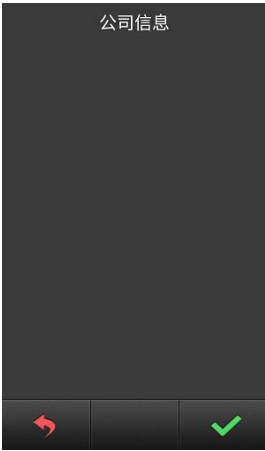

7.5



IP MAC

7.6

